



Classic Mystique PUR

mafrushat-airiyad.com



Silent Dove 1540
NCS S 1002-Y

w/r 1540
LRV 66




Quartz 1400
NCS S 2500-N

w/r 9340
LRV 50



Pale Slate 1200
NCS S 3502-B

w/r 1200
LRV 47

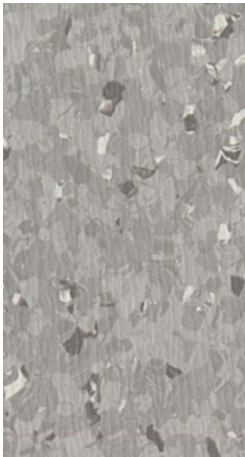

Steel Parade 1550
NCS S 3500-N

w/r 1550
LRV 36



Silver Mist 1430
NCS S 1505-Y40R

w/r 1430
LRV 62



Soft Almond 1560
NCS S 1505-Y40R

w/r 1560
LRV 64



Satinwood 1370
NCS S 1505-Y30R

w/r 8320
LRV 55



Shoreline 1460
NCS S 2020-Y30R

w/r 1460
LRV 55



Smokestone 1160
NCS S 4502-G

w/r 9120
LRV 28



Nocturne 1380
NCS S 6502-B

w/r 8270
LRV 13



Atlantic Surf 1590
NCS S 1510-R80B

w/r 1590
LRV 58



Ladoga 1410
NCS S 2010-R90B

w/r 1410
LRV 46




Nut Husk 1570
NCS S 3005-Y50R

w/r 1570
LRV 38




Sorrel Bay 1580
NCS S 3010-Y30R

w/r 1580
LRV 36

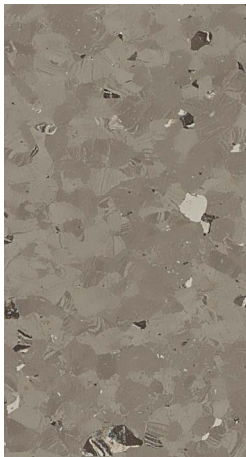

Cloud Stone 1530
NCS S 4502-Y

w/r 1530
LRV 25

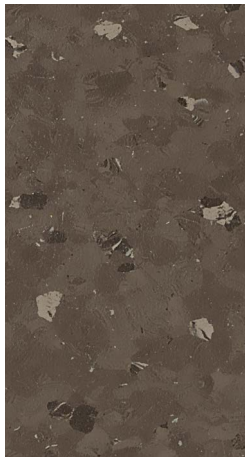


Smoked Truffle 1190
NCS S 7005-Y20R

w/r 1190
LRV 12



Cloudburst 1210
NCS S 2040-R90B

w/r 1210
LRV 32

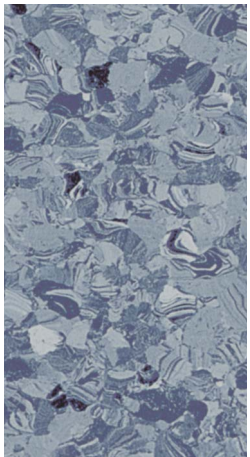

Mountain Lake 1330
NCS S 3020-R90B

w/r 8350
LRV 28




Delta Blue 1220
NCS S 6020-R80B

w/r 1220
LRV 11




Lemon Zest 1140
NCS S 1060-Y10R

w/r 1140
LRV 58

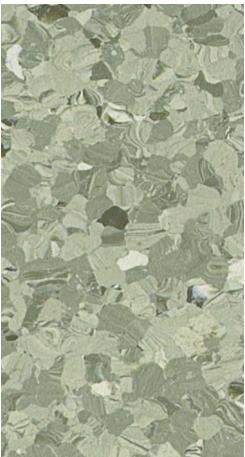

Asparagus 1320
NCS S 3010-G50Y

w/r 8360
LRV 37

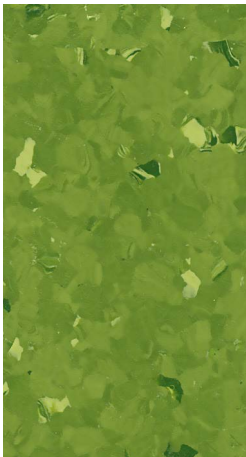

Spring Meadow 1150
NCS S 3050-G40Y

w/r 1150
LRV 22




Rich Chocolate 1520
NCS S 7010-Y50R

w/r 1520
LRV 10



Sunblaze 1260
NCS S 3060-Y90R

w/r 1260
LRV 14



w/r = weld rod NCS = Natural Colour System LRV = Light Reflectance Value



*Refer to BRE Global ratings on www.greenbooklive.com

Classic Mystique PUR

Attractive, high performance, heavy duty homogeneous floorcovering with a polyurethane reinforcement for low cost, lifetime polish free maintenance.

Featuring a non-directional duotone decoration, with marbled tonal highlight chips, Classic Mystique PUR is available in a broad palette of stylish colours. Demonstrating outstanding durability and abrasion resistance, Classic Mystique PUR is recommended for use throughout commercial interiors, healthcare and education facilities, as well as retail outlets.



	Gauge	EN 428/ISO 24346	2.0mm
	Roll Size	EN 426/ISO 24341	2m x 20m = 40m ²
	Tile Size	EN 427/ISO 24342	300mm x 300mm = 4.5m ² 608mm x 608mm = 5.17m ²
	Total Weight	EN 430/ISO 23997	3250g/m ²
	General Performance	EN 649/EN ISO 10581 ASTM F1913 ASTM F1700	Conforms Conforms Conforms
	Use Area	EN 685/ISO 10874	
	Slip Resistance	EN 13893 DIN 51130	Class DS R9
	Binder Content	EN ISO 10581	Type I
	Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648 BCA Spec C1.10 Clause 3 CAN/ULC S102.2	Class Bfl-S1 <450 Class 1 Complies FSV < 300; SDV < 500
	Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
	Residual Indentation	ASTM F970 EN 433/ISO 24343-1	≤0.125mm (750 psi) ≤0.10mm
	Impact Sound Reduction	EN ISO 10140-3	2dB
	Castor Chair (continuous use)	EN 425/ISO 4918	Suitable
	VOC Emissions	Indoor Air Comfort GOLD AgBB/ABG FloorScore Finnish M1 Classification	Eurofins certified product Pass Certified Certified
	Responsible Sourcing	BES 6001	Excellent
	Resistance to Chemicals	EN 423/ISO 26987	Good resistance
	Light Fastness	ISO 105-B02	≥6
Agrément Assurance - Polyflor Classic Mystique PUR has been independently assessed by the British Board of Agrément and product performance is assured for at least 10 years in recommended use areas. With proper maintenance, the appearance and colour will be retained during this period.			
Environmentally Preferable Flooring - Polyflor Classic Mystique PUR achieves a BRE Global Environmental A+ Rating (Certificate No: ENP 472) in major use areas such as education and healthcare and is GreenTag LCA Rate certified with GreenRate level A - Gold Plus. Generic EN 15804 Environmental Product Declaration (EPD) available on request. Polyflor Classic Mystique PUR is 100% recyclable and contains 25% recycled material. Recyclable via the Recofloor scheme. Visit www.polyflor.com/sustainability .			
PUR - Polyflor Classic Mystique PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low-cost, polish free maintenance regime for the lifetime of the flooring.			
	Bacterial Resistance	ISO 846 Part C	Does not favour growth
	Ease of Radioactive Decontamination	ISO 8690	Excellent
	Hygiene - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.		
	Polyflor homogeneous PUR ranges are compatible for use with the most commonly used alco-based hand gels and are suitable for steam cleaning on a periodic basis. For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com . The data presented is correct at the time of printing. For latest information, please visit our website polyflor.com . Decoration and shade may vary slightly from the samples shown.		



Classic Mystique PUR

Attractive, high performance, heavy duty homogeneous floorcovering with a polyurethane reinforcement for low cost, lifetime polish free maintenance.

Featuring a non-directional duotone decoration, with marbled tonal highlight chips, Classic Mystique PUR is available in a broad palette of stylish colours. Demonstrating outstanding durability and abrasion resistance, Classic Mystique PUR is recommended for use throughout commercial interiors, healthcare and education facilities, as well as retail outlets.



PRODUCT SPECIFICATION



- The flooring shall be Polyflor Classic Mystique PUR, as manufactured by Polyflor Ltd. of Manchester, England.
- The flooring shall be flexible PVC sheet flooring in 2.0mm thickness.
- It shall be homogeneous and monolayer in construction, and shall be manufactured by calendering and pressing, to ensure a dense, smooth surface and non-directional design.
- The flooring shall incorporate a specially formulated polyurethane reinforcement, to significantly reduce maintenance costs.



- The flooring material shall conform fully with the requirements of EN 649/EN ISO 10581.
- The flooring must have a Use Area Classification of 23/34/43, as defined in EN 685/EN ISO 10874.
- In respect of flamespread, the flooring shall have been fully tested to EN 13501-1 and certified as having Class Bfl-S1.
- The flooring shall have been fully tested to ASTM E648 and certified as having passed with a Class 1 rating, making it suitable for use in institutional, commercial and public buildings. The flooring shall also have been tested to ASTM E662 and have a result of <450.
- With regard to EN 13893 for slip resistance, the flooring shall be classified DS, making it suitable for use in areas which are predominantly dry, but with occasional spillage.
- With regards to EN ISO 10581 the product shall be classified Type I.
- The flooring must possess a valid Agrément certificate when laid in accordance with the instructions of Polyflor, with coved skirtings and welded joints.
- This product does not accumulate static charges above 2kV and is classified as 'antistatic' when tested to EN 1815. For specialist applications where there is a requirement to dissipate the electrostatic charge, see the Polyflor ESD product ranges.
- The flooring must be available in 2.0 metre width, to minimise the number of joints.
- In respect of light fastness, the flooring shall have been fully tested to ISO 105-B02 Method 3 and obtain ≥6



- The flooring will achieve BRE Global Environmental A+ rating ENP 472 in the Green Guide to specification in major use areas such as education and healthcare.
- Generic EN 15804 Environmental Product Declaration (EPD) available on request.
- The manufacturer should provide a facility to take back and recycle waste vinyl flooring material through the Recofloor scheme.
- The flooring shall be tested to and pass key independent, international standards for low VOC emissions.
- The product will achieve BES 6001 certification for responsible sourcing, obtaining a Excellent rating.



- The manufacturer of the floorcovering must be in possession of a valid quality systems certificate, showing compliance with BS EN ISO 9001.
- The manufacturer of the floorcovering must be in possession of a valid environmental certificate, showing compliance with ISO 14001.



- A moisture test must be carried out, to ensure that the subfloor has dried out to a level consistent with the application of vinyl flooring. The test should be carried out using a hygrometer, in accordance with the instructions in BS 8203. The result should not exceed 75%RH, once equilibrium has been achieved.
- The adhesive used must be approved by Polyflor, to ensure full product compatibility.
- Products must be fully conditioned to the environment in which they are to be installed, as outlined by Polyflor.
- Installation must be carried out in accordance with BS 8203 and the instructions of Polyflor.
- All joints must be welded to produce hygienic, continuous floors.
- Suitable for use with underfloor heating up to 27°C. See Polyflor Technical Information for details.



- Polyflor homogeneous PUR flooring ranges are compatible for use with the most commonly used alco-based hand gels and are suitable for steam cleaning on a periodic basis. For clarification and for information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com.
- At the date of issue the data presented is correct. However, Polyflor Ltd. reserve the right to make changes which do not adversely affect performance or quality.

