








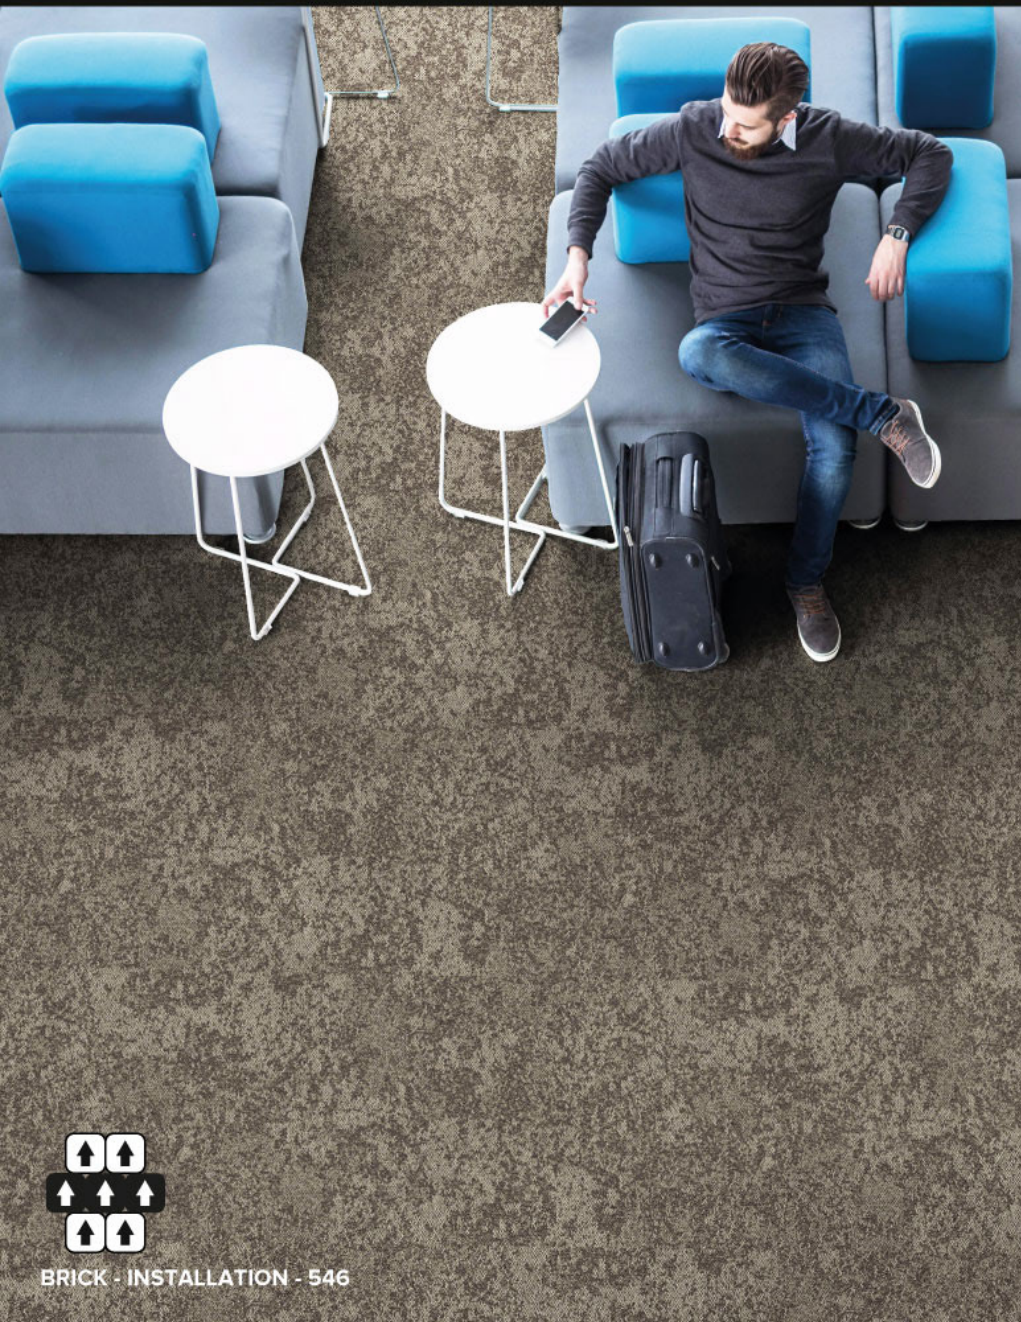

BRICK - INSTALLATION - 574




BRICK - INSTALLATION - 558




Fiber	100% Nylon (Polyamide 6)
Construction	Loop
Yarn Type	BCF
Tufting Gauge	1/10"
Dye Method	Solution Dyed
Pile Weight	550 g/m ²
Number of Tufts	208820/m ²
Primary Backing	Non-Woven
Secondary Backing	PVC
Tile Size	50 cm x 50 cm
Pile Height	3.0 mm ± 0.25 mm
Total Tile Height	6.0 mm ± 0.5 mm

INSTALLATION METHODS:



Quarter Turn



Brick

Performance Specifications

VOC Emission	ASTM D5116-17	<0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Critical Radiant Flux	ASTM E648-08	Class I
Static Propensity	AATCC 134-2011	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	DIN 52612	.04m2 K/W
Impact Sound Insulation	ISO 140-8	ΔLw 23dB
Sound Absorption Level	EN ISO 354	αω: 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	ISO 4918	Rating 4.0

