



Carpet Tile



Colour Bank
2476




Colour Bank
2479



Colour Bank
2458



Colour Bank
2455



Colour Bank
2495

Details

Construction	Pile Height
Loop Pile	3.5 mm
Fiber	Total Thickness
100% Olefin	6.5 mm
Dye Method	Primary Backing
Solution Dyed	Non Woven
Tile Size	Secondary Backing
50 cm × 50 cm	PVC
Pile Weight	Tufting Gauge
450 g/m²	1/12"
Tufts per m²	INSTALLATION METHODS: Quarter Turn Brick
212850	


VOC (Green Label Plus)	ASTM D5116-06	<0.5 mg/m²/hour
Flammability (Pill Test)	ASTM D-2859/FF 1-70/16CFR 1630	Pass 8/8
Reaction to Fire	EN ISO 9239-1:2002	Dfl - s1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	<0.20%



Colour Bank
985



Colour Bank
965



Colour Bank
185




Colour Bank
964

PLATINUM


03

TECHNICAL SPECIFICATIONS


Manufacturing process	Tufting 1/10" looppile
Pile content	100% PP Stainsafe®
Total weight	ca. 4.300 g/m ²
Pile weight	ca. 550 g/m ²
Total height	ca 7mm
Pile height	ca. 4mm
Tuft density	ca.212.760/m ²
Size	50x50cm
Packaging	5 m
Antistatique	< 2 kV
Fire class	Centexbel 0493-CPR-0130
Sound insulation	22 dB
Fastness to light	5-6
Water fastness	4-5



Colour Bank
Aqua 10




Colour Bank
Beige 10



Colour Bank
Coal 10



Colour Bank
Charcoal 10



Colour Bank
Chocolate 10

BESPIN

05

Bespin

Use Classification

Medium Commercial / Class 32

Product Description Medium Commercial PP Tufted Loop Pile Bitumen Tile

Recycled Content n/a

Fibre Type Stainproof Miracle Fibre - Polypropylene

Fibre Mass $\pm 515\text{g/m}^2 (\pm 15)$ $\pm 15.18\text{ oz/yd}^2 (\pm 0.44)$

Pile Height $\pm 4\text{mm} (\pm 0.5)$ $\pm 0.16\text{in} (\pm 0.02)$

Total Thickness $\pm 6.0\text{mm} (\pm 0.5)$ $\pm 0.24\text{in} (\pm 0.02)$

Total Mass ** $\pm 3892\text{g/m}^2 (\pm 5\%)$ $\pm 114.78\text{ oz/yd}^2 (\pm 5\%)$

MTO Sizes (tile) 50x50cm 19.69x19.69(in)

MTO Backing Options NexBac (NB)

Machine Gauge 1/10"

Stitch Rate 35 stitches/10cm

Fire Classification Bfl -s1

Colour Fastness to:

Light > 6.0 (NF EN ISO 105-BO2)

Rubbing (staining) 4-5 (ISO 105-X12)

Water (staining) 4-5 (ISO 105-EO1)

Electrostatic Propensity:
Body voltage $\leq 2.0\text{ kV}$ (ISO 6356: 2012)

Sound Absorption aw: 0.15 (ISO 354: 2023)

Sound Insulation 25dB (ISO 10140-3: 2021)

Thermal Resistance $0.0740\text{ m}^2.\text{KW}$ (ISO 8302: 2001)

Dimensional Stability $\leq 0.2\%$ (ISO 986: 2006)

VOC Emissions
(GBCSA/ GBCA & CRI Specifications) Passed (ASTM D5116: 2017)

Castor Chair Suitability Occasional Use (NF EN 985 – Method A)

Guarantee 15 years

Warranty 5 years

** Weighted Average





Colour Bank
2645



Colour Bank
2648



Colour Bank
2655



Colour Bank
2656



Colour Bank
2658



Colour Bank
2675



Colour Bank
2679

Black Horse


07

PRODUCT INFORMATION


Fiber	100% Olefin
Construction	Loop
Yarn Type	BCF Stanlon
Tufting Gauge	1/10"
Dye Method	Solution Dyed Olefin
Pile Weight	650 g/m ²
Number of Tufts	193060/m ²
Primary Backing	Non-Woven
Secondary Backing	PVC
Tile Size	50 cm x 50 cm
Pile Height	4.0 mm + 0.25 mm
Total Tile Height	7.0 mm + 0.5 mm

TECHNICAL PERFORMANCES


VOC (Green Label Plus)	ASTM D5116-06	< 0.5 mg/m ² /hour
Flammability (Pill Test)	ASTM D-2859 / FF 1-70 / 16CFR 1630	Pass 8/8
Reaction to Fire	EN ISO 9239-1:2002	Dfl - s1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%




Colour Bank
659




Colour Bank
672



Colour Bank
674



Colour Bank
679



Colour Bank
695


BUSINESS LINE

09

Business Line Carpet Tile

Fiber	Olefin 100%
Construction	Loop
Yarn Type	BCF Stanlon
Tufting Gauge	1/12"
Dye Method	Solution Dyed Olefin
Pile Weight	650 g/m ²
Number of Tufts	184860/m ²
Primary Backing	Non-Woven
Secondary Backing	PVC
Tile Size	50 cm x 50 cm
Pile Height	2.3 mm / 5.5 mm ± 0.25 mm
Total Tile Height	8.0 mm ± 0.5 mm

VOC (Green Label Plus)	ASTM D5116-06	< 0.5 mg/m ² /hour
Flammability (Pill Test)	ASTM D-2859 / FF 1-70 / 16CFR 1630	Pass 8/8
Reaction to Fire	EN ISO 9239-1:2002	Dfl - s1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%



Colour Bank
CY #1



Colour Bank
CY #2



Colour Bank
CY #3



Colour Bank
CY #4




Colour Bank
CY #7



Colour Bank
CY #8



Colour Bank
CY #9



Colour Bank
CY #11


Specifications

Construction	multi-level loop
Fiber	100% PP
Dye Method	solution dyed
Gauge	1/12"
Stitches	10 per inch
Pile Weight	21 OZ / yd ²
Pile Height	4mm±0.5mm
Total Thickness	7mm±0.5mm
Backing	PVC with fiberglass
Tile Size	50cm x 50cm

Installation Method



Monolithic



Brick




Quarter-turn

Performance


Flammability:	Passes (ASTM E648)
Smoke Density:	Passes (ASTM E662)
Static Propensity:	≤3.0kV (AATCC 134)
Soil & Stain Protection:	Excellent Soil Resistance
Color Fastness to Light:	5 (AATCC-16E)
Dimensional Stability:	<0.2% (AACHEN)
Hexapod:	2.5 (ASTM D5252)

Warranties

5 years limited warranty:
No more than 10% face yarn loss by weight under normal use.
Limited static warranty.
Limited delamination warranty under normal use.



Colour Bank
382



Colour Bank
390



Colour Bank
553




Colour Bank
595



Colour Bank
790



Colour Bank
810



Colour Bank
827



Colour Bank
950



Colour Bank
966



Colour Bank
970




Colour Bank
980


DIVA

13

Manufacturing process Tufting 1/10" looppile	Méthode de fabrication Tuftée 1/10" poil bouclé	Herstellungsverfahren Getuftet 1/10" Schlingenpol	Fabricagemethode Getuft 1/10" lussenpool
Pile content 100% PP Stainsafe®	Composition du velours 100% PP Stainsafe®	Polmaterial 100% PP Stainsafe®	Poolnamenstelling 100% PP Stainsafe®
Total weight Ca. 3.725 g/m²	Poids totale Ca. 3.725 g/m²	Gesamtgewicht Ca. 3.725 g/m²	Totaal gewicht Ca. 3.725 g/m²
Pile weight Ca. 360 g/m²	Poids du velours Ca. 360 g/m²	Polgewicht Ca. 360 g/m²	Poolgewicht Ca. 360 g/m²
Total height Ca. 5,7 mm	Hauteur totale Ca. 5,7 mm	Gesamthöhe Ca. 5,7 mm	Totale hoogte Ca. 5,7 mm
Pile height Ca. 2,8 mm	Hauteur du velours Ca. 2,8 mm	Florhöhe Ca. 2,8 mm	Poolhoogte Ca. 2,8 mm
Tuft density Ca. 149.600/m²	Nombre de touffes Ca. 149.600/m²	Noppenzahl Ca. 149.600/m²	Aantal noppen Ca. 149.600/m²
Size 50 x 50 cm	Dimensions 50 x 50 cm	Abmessung 50 x 50 cm	Afmetingen 50 x 50 cm
Packaging 5 m²	Emballage 5 m²	Verpackung 5 m²	Verpakking 5 m²
Antistatique < 2 kV	Antistatique < 2 kV	Antistatisch < 2 kV	Antistatisch < 2 kV
Fire class C _{fl} s1 (EN 13501-1)	Classement feu C _{fl} s1 (EN 13501-1)	Brandverhaltensklasse C _{fl} s1 (EN 13501-1)	Brandklasse C _{fl} s1 (EN 13501-1)
Fastness to light 5-6	Solidité à la lumière 5-6	Lichtechtheit 5-6	Lichtechtheid 5-6
Water fastness 4-5	Solidité à l'eau 4-5	Wasserechtheit 4-5	Waterechtheid 4-5

Colour ⇄	155	382	390	553	595	790	810	827	930	942	950	966	970	980
50 x 50 cm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

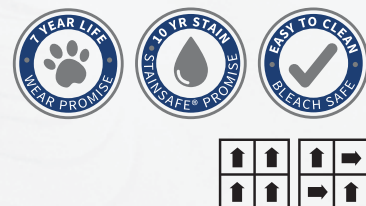

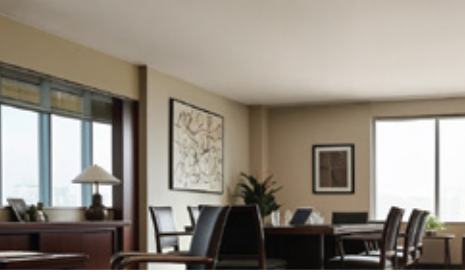

Colour Bank
625



Colour Bank
641



Colour Bank
649



Colour Bank
654



Colour Bank
663



Colour Bank
666



Colour Bank
627



Colour Bank
679



Colour Bank
695



Colour Bank
678



Colour Bank
656



Colour Bank
643



Colour Bank
640



Colour Bank
660



Colour Bank
648



Colour Bank
642



Colour Bank
655



Colour Bank
677

COZMIC

15

PRODUCT DETAILS

Fiber	100% Olefin
Construction	Loop
Yarn Type	BCF Stanlon
Tufting Gauge	1/10"
Dye Method	Solution Dyed Olefin
Pile Weight	580 g/m ²
Number of Tufts	158000/m ²
Primary Backing	Polyester
Secondary Backing	PVC
Tile Size	50 cm x 50 cm
Pile Height	3.5 mm ± 0.25 mm
Total Tile Height	5.6 mm ± 0.5 mm

PERFORMANCE DETAILS

VOC (Green Label Plus)	ASTM D5116-06	< 0.5 mg/m ² /hour
Flammability (Pill Test)	ASTM D-2859 // FF 1-70 // 16CFR 1630	Pass 8/8
Reaction to Fire	EN ISO 9239-1:2002	Dfl - s1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%



Brick



Quarter Turn



Colour Bank
2678



Colour Bank
2648



Colour Bank
2647



Colour Bank
2655



Colour Bank
2677



Colour Bank
2657

TECHNICAL DATA :


Construction	Loop
Fiber	BCF Stanlon %100 Olefin
Dye Method	Solution dyed Olefin
Gauge	1/12
Stitches	184860 /m ²
Pile Weight	19 OZ/yd ² (650 gms/m ²)
Pile Height	2.3mm ± 0.25mm
Total Thickness	8mm ± 0.5mm
Packaging	5 m ²
Tile Size	50cm x 50cm




Quarter Turn




Brick



Colour Bank
185



Colour Bank
685



Colour Bank
945




Colour Bank
965

QUARTZ

19

TECHNICAL DATA :

Manufacturing process	Tufting 1/10" looppile
Pile content	%100 PP Stainsafe
Total weight	Ca. 4.300 g/m ²
Pile weight	Ca. 550 g/m ²
Total height	Ca. 7 mm
Pile height	Ca. 4 mm
Tuft density	Ca. 212.760/m ²
Fire class	Cfl-s1 (EN 13501-1)
Packaging	5 m ²
Tile Size	50cm x 50cm




صنع في بلجيكا




Colour Bank
AD08 9513



Colour Bank
AD08 2032





Colour Bank
AD08 8913




Colour Bank
AD08 7803

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Structured loop pile					
Dye method			Solution dyed					
Dimension	EN ISO 24342	cm x cm	50 x 50 / 19,68” x 19,68” (20 tiles per box)					
Primary backing	ISO 2424		Polyester fleece					
Secondary backing	ISO 2424		ProBase - modified bitumen.					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	6,5	inch	0,3			
Effective pile thickness	ISO 1766	mm	3,4	inch	0.13			
Total mass	ISO 8543	g/m²	4000	oz/yd²	118.1			
Total pile mass	ISO 2424	g/m²	580	oz/yd²	17.1			
Effective pile mass	ISO 8543	g/m²	380	oz/yd²	11.2			
Pile density	ISO 8543	g/cm³	0.112	lb/in³	0.0040			
Number of tufts	ISO 1763	/dm²	1580	/yd²	132104			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 1					
Dimensional stability	EN 986	%	≤ 0,2					
Impact sound reduction ΔL _w	ISO 10140	dB	25					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	0.00	0.02	0.06	0.17	0.29	0.37
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.078					
Flammability	EN 13501-1		Bfl - s1 (loose laid tested)					
Prodis - GUT	www.pro-dis.info		AEB3E85F					

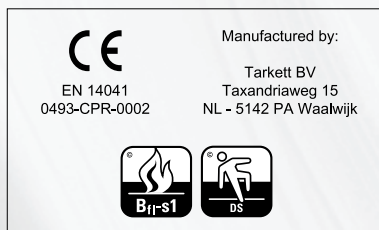





Colour Bank
549



Colour Bank
558




Colour Bank
574



Colour Bank
578

Fiber	100% Nylon (Polyamide 6)
Construction	Loop
Yarn Type	BCF
Tufting Gauge	1/10"
Dye Method	Solution Dyed
Pile Weight	550 g/m ²
Number of Tufts	208820/m ²
Primary Backing	Non-Woven
Secondary Backing	PVC
Tile Size	50 cm x 50 cm
Pile Height	3.0 mm ± 0.25 mm
Total Tile Height	6.0 mm ± 0.5 mm



VOC Emission	ASTM D5116-17	< 0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859 // FF 1-70 // 16CFR 1630	Pass 8/8
Critical Radiant Flux	ASTM E648-08	Class I
Static Propensity	AATCC 134-2011	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	DIN 52612	0.04 m ² K/W
Impact Sound Insulation	ISO 140-8	ΔLw 23 dB
Sound Absorption Level	EN ISO 354	αw: 0.15 (H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	ISO 4918	Rating 4.0







Colour Bank
SP 01



Colour Bank
SP 02




Colour Bank
SP 03



Colour Bank
SP 04



Colour Bank
SP 05



Colour Bank
SP 06




Colour Bank
SP 07

SUPER PEARL

25


PRODUCT SPECIFICATIONS

QUALITY NAME	SUPER PEARL
CONSTRUCTION	LOOP PILE
MATERIAL	100% OLEFIN
DYE METHOD	SOLUTION DYED
GAUGE	1/10 th
TOTAL WEIGHT	4000 GSM/M2
PILE HEIGHT	4MM (+/- 5%)
BACKING STRUCTURE	FIBRE GLASS RE-INFORCED
TILE SIZE	50CM X 50 CM
LIGHT FASTNESS	4-5
WATER RESISTANCE	3-4
SOUND INSULATION	27 dB
STATIC CONTROL	AATCC-134 under 3.5kV
FIRE CLASS	ASTM-D-2859

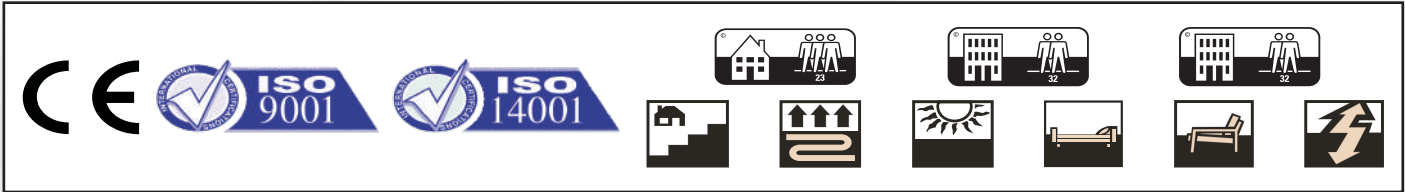



Colour Bank
380



Colour Bank
880




Colour Bank
900



Colour Bank
980

Manufacturing process Tufting 1/10" looppile	Méthode de fabrication Tuftée 1/10" poil bouclé	Herstellungsverfahren Getuftet 1/10" Schlingenpol	Fabricatiemethode Getuft 1/10" lussenpool
Pile content 100% PP Stainsafe®	Composition du velours 100% PP Stainsafe®	Polmaterial 100% PP Fleckweg®	Poolsamenstelling 100% PP Stainsafe®
Pile weight Ca. 550 g/m²	Poids du velours Ca. 550 g/m²	Polgewicht Ca. 550 g/m²	Poolgewicht Ca. 550 g/m²
Total weight Ca. 4.300 g/m²	Poids totale Ca. 4.300 g/m²	Gesamtgewicht Ca. 4.300 g/m²	Totaal gewicht Ca. 4.300 g/m²
Pile height Ca. 4 mm	Hauteur du velours Ca. 4 mm	Florhöhe Ca. 4 mm	Poolhoogte Ca. 4 mm
Tuft density Ca. 212.760/m²	Nombre de touffes Ca. 212.760/m²	Noppenzahl Ca. 212.760/m²	Aantal noppen Ca. 212.760/m²
Total height Ca. 7 mm	Hauteur totale Ca. 7 mm	Gesamthöhe Ca. 7 mm	Totale hoogte Ca. 7 mm
Size 50 x 50 cm	Dimensions 50 x 50 cm	Abmessung 50 x 50 cm	Afmetingen 50 x 50 cm
Packaging 5 m²	Emballage 5 m²	Verpackung 5 m²	Verpakking 5 m²
Antistatique < 2 kV	Antistatique < 2 kV	Antistatisch < 2 kV	Antistatisch < 2 kV
Fire class C _{fl} -s1 (EN 13501-1) Centexbel 0493-CPR-0130	Classement feu C _{fl} -s1 (EN 13501-1) Centexbel 0493-CPR-0130	Brandverhaltensklasse C _{fl} -s1 (EN 13501-1) Centexbel 0493-CPR-0130	Brandklasse C _{fl} -s1 (EN 13501-1) Centexbel 0493-CPR-0130
Sound insulation 22 dB	Isolation aux bruits d'impact 22 dB	Trittschalldämmung 22 dB	Geluidsisolatie 22 dB
Fastness to light 5-6	Solidité à la lumière 5-6	Lichtechtheit 5-6	Lichtechtheid 5-6
Water fastness 4-5	Solidité à l'eau 4-5	Wasserechtheit 4-5	Waterechtheid 4-5




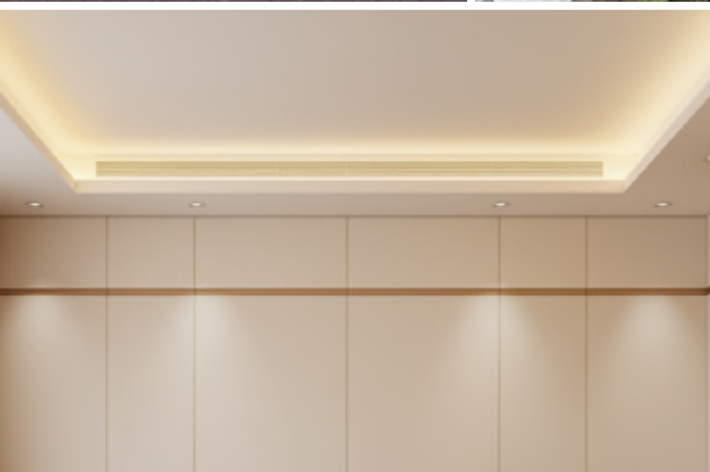

Colour Bank
SWH #2



Colour Bank
SWH #7



Colour Bank
SWH #8



Colour Bank
SWH #9



Colour Bank
SWH #11

White horse

29

Specifications

Construction	multi-level loop
Fiber	100% Nylon
Dye Method	solution dyed
Gauge	1/12"
Stitches	10 per inch
Pile Weight	20 OZ/yd ² (680 gms/m ²)
Pile Height	4mm±0.5mm
Total Thickness	10mm±0.5mm
Backing	Mix-bac
Tile Size	50cm x 50cm

Performance

Flammability:	Passes (ASTM E648 / FF 1-70 (8/8))
Smoke Density:	Passes (ASTM E662)
Static Propensity:	≤3.0kV (AATCC 134)
Soil & Stain Protection:	Excellent Soil Resistance
Color Fastness to Light:	5 (AATCC-16E)
Color Fastness to Crocking:	5 (AATCC-165)
Color Fastness to Ozone:	5 (AATCC-129)
Dimensional Stability:	<0.2% (AACHEN)
Dynamic Crush:	Negligible Impact or no change
Delamination Strength:	Excellent (No Separation)

Installation Method



Monolithic



Brick



Quarter-turn



Ashlar

Warranties

10 years limited warranty:

No more than 10% face yarn loss by weight under normal use.


Limited static warranty.

Limited delamination warranty under normal use.






Colour Bank
2623



Colour Bank
2642




Colour Bank
2643




Colour Bank
2655



Colour Bank
2667




Colour Bank
2672




Colour Bank
2673



Colour Bank
2674




Colour Bank
2675



Colour Bank
2678



Colour Bank
2679



Colour Bank
2685

Easy Line


31

PRODUCT INFORMATION


Fiber	100% Olefin
Construction	Loop
Yarn Type	BCF Stanlon
Tufting Gauge	1/10"
Dye Method	Solution Dyed Olefin
Pile Weight	650 g/m ²
Number of Tufts	193060/m ²
Primary Backing	Non-Woven
Secondary Backing	PVC
Size	25 cm x 100 cm
Pile Height	4.0 mm ± 0.25 mm
Total Tile Height	7.0 mm ± 0.5 mm

TECHNICAL PERFORMANCE

VOC (Green Label Plus)	ASTM D5116-06	< 0.5 mg/m ² /hour
Flammability (Pill Test)	ASTM D-2859 // FF 1-70 // 16CFR 1630	Pass 8/8
Reaction to Fire	EN ISO 9239-1:2002	Dfl - s1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%



Ashlar



Quarter Turn



Herringbone

